



No.	项目 Item	规格 Specification	条件 Condition
1	额定电压 Rated Voltage	12V DC	
2	相数 No. of Phase	2-phase	
3	相电阻 Resistance Per Phase	53±7% Ω	At 20°C
4	电感 Inductance Per Phase	23.5±20% mH	参考值
5	相电流 Current Per Phase	0.23A	
6	步长 Travel Per Step Avail	0.0417mm	
7	推力 The Mark Thrust	25N	At 130Hz
8	拉力 The Mark Pull	25N	At 130Hz
9	最小工作电压 MIN Working Voltage	6V	
10	总行程 After All Journey	≥12mm	
11	环境温度 Operating Temp Range	-40°C~125°C	
12	防护等级 Protection Rate	IP34	
13	绝缘电阻 Insulation Resistance	>100M Ω	Winding to the crust
14	使用寿命 Life	1,500,000 return	(a cycle) advance 11mm, backing out 11mm
15	引出线规格 Lead Write	高温线AF-200	
16	重量 Weight	37g	

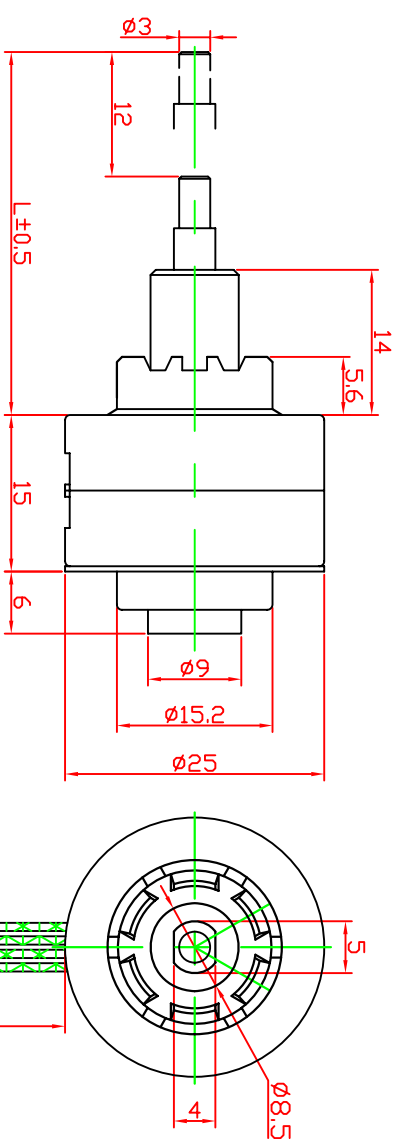

Pin No.	WIRE COLOR	STEP			
		1	2	3	4
1	黄 YEL	-	-	-	-
2	红 RED	-	-	-	-
3	红 RED	-	-	-	-
4	黄 YEL	-	-	-	-
5					
6					

设计	处数	更改文件号	签字	日期	25BYZ-A01		比例	2:1	MAX MOTOR Co.,Ltd
审核					A	B			
					共	页	第	页	TEL: +86-755-84679112
			工艺						FAX: +86-755-89361286
			批准						http://www.max-motor.com
									Email: max@max-motor.com