



No.	项目 Item	规格 Specification	条件 Condition
1	额定电压 Rated Voltage	5V DC	
2	相数 No. of Phase	2-phase	
3	相电阻 Resistance Per Phase	11±10% Ω	At 20°C
4	电感 Inductance Per Phase	8.6±20%mH	
5	相电流 Current Per Phase	0.46A	
6	步长 Travel Per Step Avail	0.0254mm	
7	推力 The Mark Thrust	55N	At 100Hz
8	拉力 The Mark Pull	55N	At 100Hz
9	总行程 After All Journey	≥75mm	
10	环境温度 Operating Temp Range	-40°C~125°C	
11	防护等级 Protection Rate	IP34	
12	绝缘电阻 Insulation Resistance	>100M Ω	Winding to the crust
13	使用寿命 Life	1,500,000 return	(a cycle) advance 39mm, backing out 39mm
14	引出线规格 Lead Wrie	高温线AF-200	
15	重量 Weight	86g	
16			

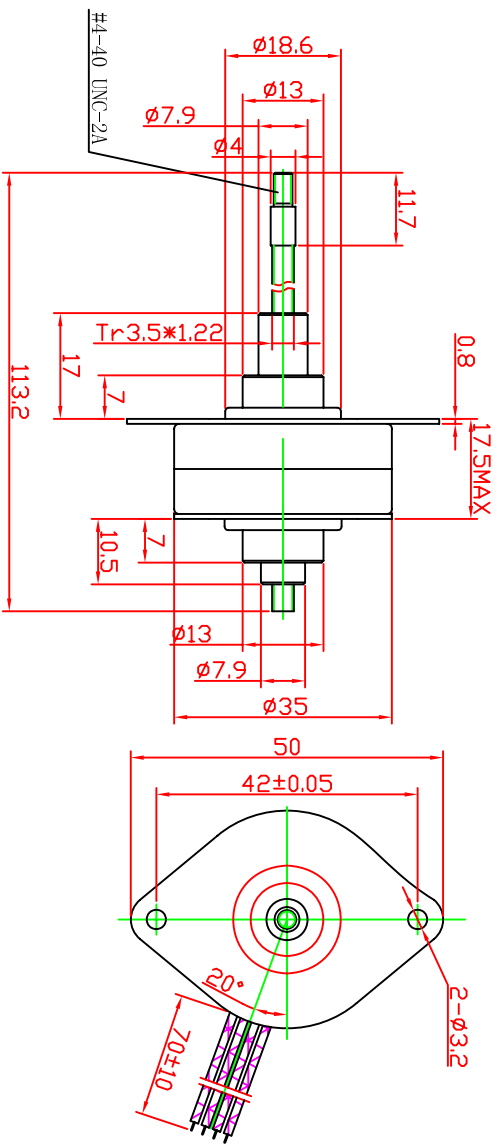

Pin No.	WIRE COLOR	STEP			
		1	2	3	4
1	黄 YEL	-	-	-	-
2	红 RED	-	-	-	-
3	红 RED	-	-	-	-
4	黄 YEL	-	-	-	-
5					
6					

35BYZ-B01		MAX MOTOR Co.,Ltd	
TEL: +86-755-84679112	http://www.max-motor.com		
FAX: +86-755-89361286	Email: max@max-motor.com		
标记处数	更改文件号	签字	日期
设计	工艺	批准	
审核			
35BYZ-B01		比例 2:1	
标记	版本	共 页 第 页	
A	A/0		